




2MP H.265 Starlight 12x Vandal Resistant High Speed Dome IP Camera

Features

- Sony 1/2.8" 2.1MP STARVIS sensor
- Starlight sensitivity
- 12X optical zoom
- H.265 / H.264 / M-JPEG dual streams
- Micro SD slot for recording
- Enhancements: T-WDR (120dB), 3D NR, defogging
- ONVIF (Profile S)
- Power over Ethernet (PoE)



Dimensions

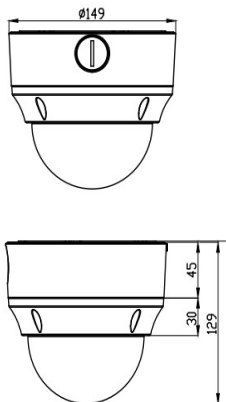

Specifications

| Model | PZ2-T210 |
|-----------------------|--|
| CAMERA | |
| Image Sensor | Sony 1/2.8" 2.1MP STARVIS sensor |
| Effective Pixel | 1920 (H) x 1080 (V) |
| Frame Rate | 25/30fps |
| Resolution | up to 1920 x 1080 (main stream); up to D1 (sub stream) |
| Video Compression | H.265 / H.264 / M-JPEG (16kbps – 8000kbps) |
| Open Standard | ONVIF (Profile S) |
| Min. Illumination | 0.02 lux (colour), 0.002 lux (B/W) |
| Lens | 12X optical zoom, f=4.7–56.4mm |
| Angle of View | 6.4° ~ 60.9° |
| Electronic Shutter | 1/15 (Max) ; 1/5000 (Min) |
| S/N Ratio | ≥50db |
| CONTROL | |
| Video Adjustment | Brightness, contrast, saturation, sharpness, hue |
| 3D Noise Reduction | Close / low / mid / mid-high / high |
| True WDR | Close / low / mid / high |
| Video Compensation | BLC / HLC / off |
| Auto Gain Control | Auto / on / off |
| Day / Night | Auto / color / B/W / external |
| Privacy Mask | 8 zones |
| ROI | 4 zones |
| Mirror | Close / horizontal / vertical / 180° rotation |
| Defogging | Close / open |
| Slow Shutter | Close / open |
| TELEMETRY | |
| Panning Angle | 360° |
| Panning Speed | 0.1°-200°/sec (manual); 240°/sec (preset) |
| Tilting Angle | 90° |
| Preset | 256 |
| Patrol | 8 |
| Tour | 8 |
| Pattern | 4 |
| Home Position | Preset / patrol / tour / pattern / off |
| EVENT | |
| Event Type | External alarm, video motion detection, video tamper, network interruption |
| Video Analysis | Tripwire, loitering, missing / unattended object detection, crowd monitoring |
| Action Type | Dial-back, snapshot, relay switch control, email notification, micro SD card recording |
| External Alarm Input | 1 |
| Motion Detection | 4 |
| Relay Output | 1 |
| COMMUNICATION | |
| Network | RJ-45, 100 base-T |
| Protocol | TCP/IP, UDP, HTTP, DHCP, RTSP, DDNS, SMTP(SSL), PPPoE, UPNP, NTP, P2P, FTP |
| Concurrent Connection | 4 |
| Audio Input | 1 |
| Audio Output | 1 |
| Video Output | 1 (CVBS) |
| MISCELLANEOUS | |
| Weather Protection | IP66 |
| Operating Environment | -20 ~ 55°C / 90% relative humidity (no condensation) |
| Power Supply | DC24V/PoE (IEEE802.3at), 10W |
| Dimensions (mm) | 129 (H) x Φ149 (D) |
| Weight | 2kg |
| Accessories | CC-WL0V3, CC-DP0V3 |



AVAS USA

7421 Douglas Blvd Suite N #217
Douglasville, GA 30135.
Tel : 770-941-2827
Fax : 770-941-2827

Email : info@avasusa.com
Website : www.avasusa.com